


Premium RF Label 19x65

White



LUCATRON®

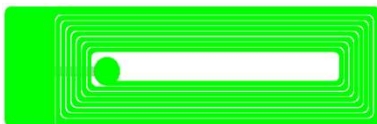

Product Code

RF premium label 19x65 D-W-2K-c76
Article No. 992942

Label Dimensions

Label MD Length.....19±0.5mm(0,75"±0,0197")
Label CD Length.....65±0.5mm(2,56"±0,0197")
Label Thickness.....0.25 mm±0.02mm
Liner Width (CD).....68±1.0mm(2,68"±0,0394")
Label Repeat (MD).....22±0.5mm(0,867"±0,0197")
Label Gap (MD).....3±0.5mm(0,12"±0,0197")
Hot melt adhesive.....934D Henkel
Circuit Side.....Green ink
Material construction.....70um AL+15um CPP+10um AL

Technical Specifications

Resonance Frequency8.2MHz +/- 5%
Effective Signal Volume.....>900cm³
Quality Factor≥65
Deactivations Rate≥99.9%
Detection Rate≤99% *
Version.....max 2% bad labels per reel, not marked

Environmental Constraints

Recommended Storage
Temperature.....12°C-25°C(54°F-77°F)
Humidity.....55% maximum
Shelf Life.....2 years from date of manufacture

* Detection rate is measured in our Lab with a Nedap EQ 45 RX/TX antenna set at 1,70 m antenna distance (1,70 m distance between the RX and the TX antenna).

Roll Specifications

Paper	80g thermo transfer
Diameter of core	76 mm
Max roll diameter	152 mm
Number splices	10 maximum
Net weight/carton	11.28 kg
Gross weight/carton	12.03 kg
Carton dimensions	315x315x240 mm
Rolls per carton	12
Cases per pallet	54
Labels per roll	2,000

Product Application Guidelines

- Place within 76mm(3") of bar code.
- Place in least conspicuous location.
- Do not cover warnings, expiration dates, or important consumer information
- No specific label orientation is required

Labels will be always supplied according to above mentioned quality. Especially in regards to deactivation rate, reactivation rate, Q-factor and center frequency and effective volume.



Member of the All4Labels
Global Packaging Group



All4Labels
GLOBAL PACKAGING GROUP

info@rakosl.com | www.rakosl.com