


Premium RF Label 23x50

white

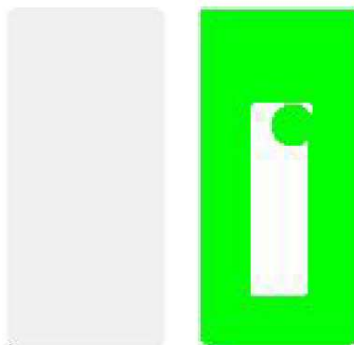

LUCATRON®

Product Code

RF premium label 23x50 D-W-2K-c76
Article No. 993093

Label Dimensions

Label MD Length.....23±0.5mm(0,91"±0,0197")
Label CD Length.....50±0.5mm(1,97"±0,0197")
Label Thickness.....0.22mm±0.015mm
Liner Width (CD).....54±1.0mm(2,13"±0,0394")
Label Repeat (MD).....25.9±0.5mm(1,02"±0,0197")
Label Gap (MD).....2.9±0.5mm(0,11"±0,0197")
Hot melt adhesive.....934D Henkel
Circuit Side.....Green ink
Material construction.....70µm AL+15µm CPP+10µm AL

Technical Specifications

Resonance Frequency8.2MHz +/- 4%
Effective Signal Volume.....>650cm³
Quality Factor *.....≥60
Deactivations Rate≥99.9%
Reactivation Rate≤5%
Version.....max 2% bad labels per reel,
not marked

Environmental Constraints

Recommended Storage
Temperature.....12°C-25°C(54°F-77°F)
Humidity.....55% maximum
Shelf Life.....2 years from date of
manufacture

* Factor is depending on climate conditions and on type of Q-Factor measuring equipment used.
All technical details are subject to technical modification without prior notice.

Roll Specifications

Paper	80g thermo transfer
Diameter of core	76 mm
Max roll diameter	140 mm
Number splices	3 maximum
Net weight/carton	7 kg
Gross weight/carton	8 kg
Carton dimensions	390x290x220 mm
Rolls per carton	10
Cases per pallet	60
Labels per roll	2,000

Product Application Guidelines

- Place within 76mm(3") of bar code.
- Place in least conspicuous location.
- Do not cover warnings, expiration dates, or important consumer information
- No specific label orientation is required

Labels will be always supplied according to above mentioned quality. Especially in regards to deactivation rate, reactivation rate, Q-factor and center frequency and effective volume.



Member of the All4Labels
Global Packaging Group



All4Labels
GLOBAL PACKAGING GROUP

info@rakosl.com | www.rakosl.com